Drain body, Socket inclination 1.5°

Product information for the product group



- Drain body DN50 / DN30 available on request
- Drain body can be rotated 360°
- ☐ Suitable for all push fit pipe socket systems

Product benefits

- Available in 1.4301 (304) or 1.4404 (316L) grades of stainless steel, pickled and passivated
- Anchors for fixing in concrete
- Flexible installation due to rotatable and adjustable gully
- Recessed grating for improved drainage
- Integrated FAT for easy maintenance
- Suitable for public areas due to locked grating
- Borderless drainage solutions Easy accessibility
- Water sealant height: 50 mm
- □ Slotted grating of stainless steel (Custom designs available on request)
- Designed for perfect application with vinyl sheeting

- Load class: K 3
- Brushed silk gloss grating
- Locked grating




Item No: POL VCH


Box channel for vinyl flooring

Drain body, Socket inclination 1.5°

Item Technical Data POL VCH500



Flange design	Description	Flow rate (I/s)
☐ Location flange	□ For vinyl sheet flooring□ With clamping flange□ With slotted grating□ Grating top 527mm x 98mm	□ 0.46

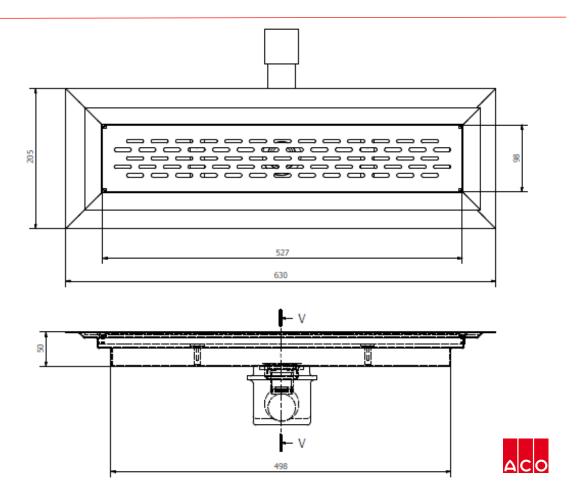


Box channel for vinyl flooring


Item No: POL VCH


Drain body, Socket inclination 1.5°

Item Technical Data POL VCH700

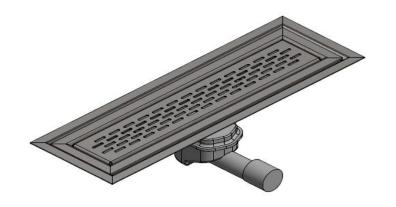

Flange design	Description	Flow rate (I/s)
Location flange	□ For vinyl sheet flooring□ With clamping flange□ With slotted grating□ Grating top 727mm x 98mm	□ 0.46

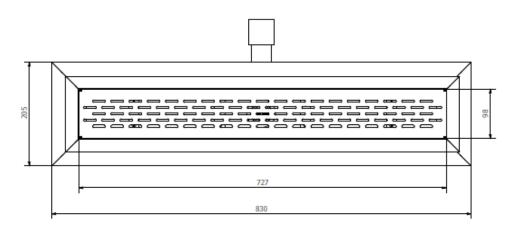

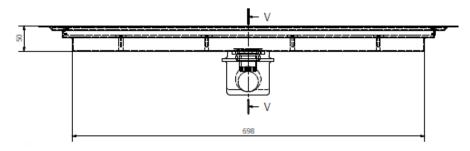




Item No: POL VCH

Drain body, Socket inclination 1.5°

Item Technical Data POL VCH900

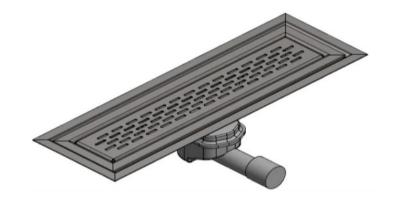

Flange design	Description	Flow rate (I/s)
Location flange	□ For vinyl sheet flooring□ With clamping flange□ With slotted grating□ Grating top 927mm x 98mm	□ 0.46

